

# M-88BG2 / M-88ABG2

## Dual 8" Passive / Active Subwoofer (bandpass)

M-88BG2是一款大动态倒相式紧凑型无源超低音音箱，它采用了坚固的中纤板和非常持久耐用的撒点漆；尺寸小，无论是垂直或水平摆放在任何地方，几乎都不引人注目。

M-88ABG2是有源超低音音箱内含150W高品质单通道功放，具有出色的音质和完美的动态特性，能与M-LINE全频安装系列完美配合。

### M-88BG2 Passive Subwoofer

M-88BG2 is a powerful and dynamic bandpass passive subwoofer that adopts sturdy MDF housing with textured finish. Its compact dimensions permit unobtrusive placement of the subbass anywhere, either vertically or horizontally.


### M-88ABG2 Active Subwoofer

M-88ABG2 features a 150W high-quality Mono-amplification unit offering great sound and dynamic characteristics. It can be perfectly matched with M-LINE full range installation series in practical applications.

## 1 应用领域 Application

- 咖啡厅 Cafes
- 小餐馆 Bistros
- 时装店 Fashion shop

## 2 结构图 Structural diagram

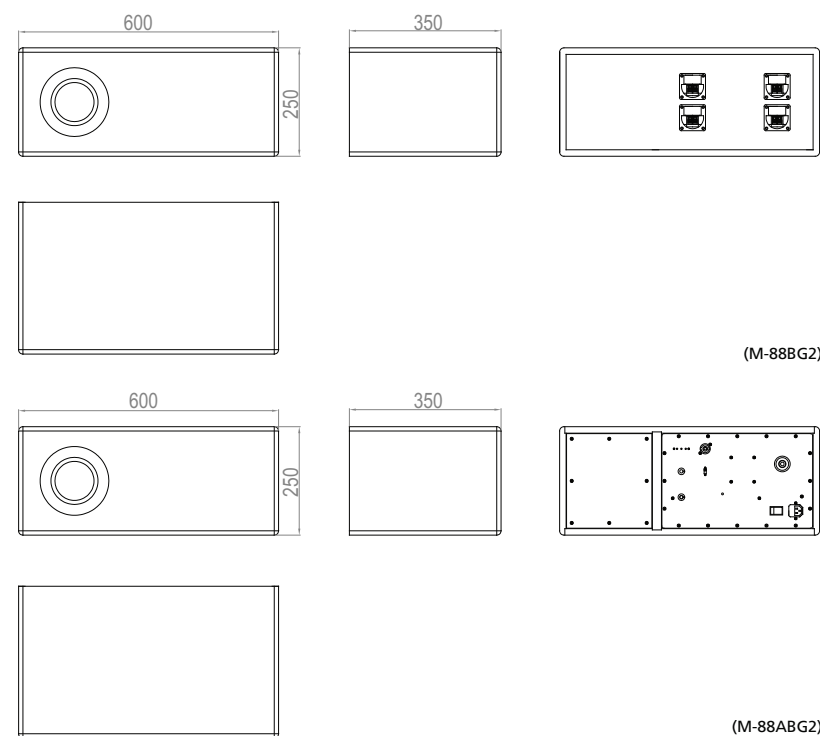

## 3 参数规格 Specification

型号名称: <b>M-88BG2</b>	Model: <b>M-88BG2</b>
类型: 2 × 8" 无源低音音箱(带通式)	Type: Dual 8" passive subwoofer (bandpass)
频率范围(-6 dB): 40 Hz - 120 Hz	Frequency response (-6 dB) : 40 Hz - 120 Hz
功率 (额定 / 峰值) (AES): 2 × 100 W / 2 × 180 W	Power handling (RMS / Peak) (AES) : 2× 100 W / 2× 180 W
灵敏度 (1 W / 1 m): 92 dB	Sensitivity (1 W / 1 m) : 92 dB
最大声压级 (1 m): 115 dB	MAX SPL (1 m) : 115 dB
阻抗: 2× 8 Ω	Impedance: 2× 8 Ω
低音单元: 2× 8" 铁氧体单元, 1" 音圈	LF Transducer: 2× 8" ferrite magnet, 1" voice coil
输入接口 / 输出接口: 夹式连接	Input interface: Clamp connection
箱体材料 / 喷漆: 15 mm MDF / PU 撒点漆	Cabinet material / Coating: 15 mm MDF / PU texture coating
尺寸 (W × H × D) : 600 × 250 × 350 mm	Dimensions (W × H × D) : 600 × 250 × 350 mm
净重: 13.3 Kg	Net weight: 13.3 Kg

型号名称: <b>M-88ABG2</b>	Model: <b>M-88ABG2</b>
类型: 2 × 8" 有源低音音箱(带通式)	Type: Dual 8" active subwoofer (bandpass)
频率范围(-6 dB): 40 Hz - 120 Hz	Frequency response (-6 dB) : 40 Hz - 120 Hz
功率 (额定 / 峰值) (AES): 150 W	Power output (RMS / Peak) (AES) : 150 W
灵敏度 (1 W / 1 m): 92 dB	Sensitivity (1 W / 1 m) : 92 dB
最大声压级 (1 m): 115 dB	MAX SPL (1 m) : 115 dB
阻抗: 4 Ω	Impedance: 4 Ω
低音单元: 2× 8" 铁氧体单元, 1" 音圈	LF Transducer: 2× 8" ferrite magnet, 1" voice coil
输入接口 / 输出接口: 输入: XLR / 6.3 mm jack, 输出: XLR	Input interface: Input: XLR / 6.3 mm jack, Output: XLR
箱体材料 / 喷漆: 15 mm MDF / PU 撒点漆	Cabinet material / Coating: 15 mm MDF / PU texture coating
尺寸 (W × H × D) : 600 × 250 × 350 mm	Dimensions (W × H × D) : 600 × 250 × 350 mm
净重: 15 kg	Net weight: 15 kg